


WC-UY900

Heavy Equipment

A Brand of



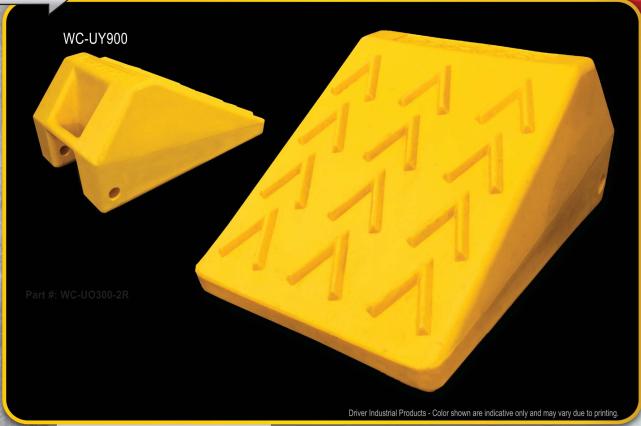

Testing & qualification is required for individual vehicle for correct product selection to meet site requirements. Advised GVW is a guide only. This will vary due to environmental factors. Please complete ar adequate risk assessment before using chocks. Do not use chocks if chocks are damaged.

Part #: WC-UY900	
Tire Size	165" (419.10cm)
Height	16.1" (40.96cm)
Width	16.5" (41.91cm)
Length	26" (66.04cm)
Weight	38 lbs (17.24kg)
GVW (Gross Vehicle	400 Ton*

*Minimum of 4

HIGHLIGHTS:

- Light weight with tough urethane construction
- Rated for vehicles with gross vehicle operating weight up to 1,600,000 lbs
 & tire sizes up to 165 in. Use a minimum of (4) UY900 chocks.
- 3rd party tested for compliance
- ANSI compliant color written guidelines on proper chocking procedures
- Approved and being used by Caterpillar and mines worldwide
- Gross Vehicle Operating Weight (GVW) of 400 ton
- Complies with SAE-J348, NFPA 1901, and NFPA 1906 Standards
- Meets MSHA specifications
- Resistant to oils, fuels and solvents
- Strong carrying handle on the backside of the chock
- High visibility color used for safety
- Holes for mounting brackets

For More Information Call or Visit Us Online Today!

DS-WC-UY900-RevA 09/08/2016

ADDRESS:

2115 W. Mountain View Rd. Phoenix, AZ 85021 USA

2677 192nd St. #107 Surrey, BC V3Z 3X1 CANADA USA

T: 602.424.2500

F: 602.424.9777

E: Sales@DriverIndustrial.com

CA

T: 604.560.5080

F: 604.560.5090

E: SalesCanada@SafetyWhips.com